

Electronic device, method, monomer and polymer

EP 20 Rec'd PCT/PTO 17 NOV 2003

The invention relates to an electronic device provided with an active element having a first and a second electrode, which are separated from each other by an active layer containing a semiconductive or electroluminescent organic material.

The invention also relates to a method of preparing a polymer comprising conjugated conjugation units A and non-conjugated intermediate units B, an intermediate unit B<sub>1</sub> mutually separating a first and a second conjugation unit A<sub>1</sub>, A<sub>2</sub> in such a manner that the conjugation of the first and the second conjugation unit A<sub>1</sub>, A<sub>2</sub> is interrupted in the intermediate unit B<sub>1</sub>.

The invention also relates to a monomer and to a polymer.

Such a device is known from, inter alia, WO-A 01/92369. This device comprises an active layer of polyphenylene-vinylene - PPV-, polythienylene-vinylene - PTV- or a similar material. PPV is a material having electroluminescent properties that is employed in display screens with light-emitting diodes as the active elements. PTV is a material having semiconductive properties that is used in transponders and liquid crystalline display screens with transistors as the active elements.

A drawback of the known device resides in that the active layer is very sensitive to oxygen and moisture. This adversely affects the service life of the device unless the device is very well encapsulated. Such an encapsulation is expensive however and adversely affects the flexibility. Devices comprising active layers of an oligomer material that is less sensitive to the influence of air and moisture, such as pentacene, are known from, for example, Brown et al., *Synt. Met.* **88** (1997), 37-55. However such a material is poorly processable from solution, as is also indicated by Brown et al.

Therefore a first object of the invention is to provide an electronic device of the type mentioned in the opening paragraph, the active layer of which has an improved stability with respect to air, light and moisture and is also readily processable from solution.

This first object is achieved in that the organic material of an active layer is a polymer comprising conjugated conjugation units which are separated from each other by non-conjugated intermediate units B in such a manner that the conjugation of the first and the second conjugation unit A<sub>1</sub>, A<sub>2</sub> is interrupted in an intermediate unit B<sub>1</sub>.

5           The device comprises an active layer wherein in fact oligomers are incorporated in a polymer matrix. The conjugation of the conjugation units is interrupted by the intermediate units. By conjugation of the conjugated units is meant that delocalized  $\pi$  orbitals are present which spread over various atoms. This forms the basis of the electroluminescent and semiconductive behavior, which is not observed in polymers without  
10 conjugation. The localization enables the electrons in the delocalized orbitals to move, which occurs when there is a voltage difference between the first and the second electrode. The mobility is comparatively low because "hopping" between the polymer chains should take place. This explanation is confirmed by the fact that higher mobilities were found for crystalline oligomers. The active layer of the invention shows the electroluminescent and  
15 semiconductive behavior as well, even though its conjugation is interrupted.

          It has been found that the active layer in the device in accordance with the invention is not, or hardly, sensitive to the influence of light, air and moisture, and that in addition said layer can be readily processed from solution. Besides, by using this active layer an active element is obtained which is sensitive to the voltages applied. In particular, a  
20 transistor is obtained which can be turned on and off.

          Polymers comprising conjugated conjugation units A and non-conjugated intermediate units B, with an intermediate unit B<sub>1</sub> mutually separating a first and a second conjugation unit A<sub>1</sub>, A<sub>2</sub> in such a manner that the conjugation of the first and the second conjugation unit A<sub>1</sub>, A<sub>2</sub> is interrupted in the intermediate unit B<sub>1</sub> are known per se, for  
25 example, from *Polymer* **41** (2000), 5681-5687 and from *Synt. Met.* **81** (1996), 157-162. Said known polymers are only known, however, for their electrochromic properties. Besides, all of the known polymers are doped. In the device in accordance with the invention, however, the organic material is not doped, because doping of the organic semiconductive material is undesirable. This can be elucidated by means of an example of a transistor: at a voltage  
30 difference between the first and the second electrode - the source and the drain electrode - a current will flow through the active layer in this element. However, this current can be suppressed by applying a voltage to a third electrode, i.e. the gate electrode. The active layer will then go into a state of depletion, causing the resistance of the active layer to increase

substantially. Owing to the presence of charge carriers due to the doping, it is no longer possible, however, to suppress current in the active layer by means of said gate electrode.

The intermediate units and the conjugation units in the polymeric material of the active layer can be distributed in various ways. The polymer may be a polymer network comprising a first and a second main chain which are interconnected via side chains, a side chain containing a  $B_1-A_1-B_2$  structure, with  $B_1$ ,  $B_2$  being intermediate units and  $A_1$  being a conjugation unit. Such a polymer network can be prepared from monomers with a  $B_1-A_1-B_2$  structure, wherein both intermediate units  $B_1$ ,  $B_2$  contain a reactive group. The reactive group, such as an acrylate or an epoxide, can react with a reactive group in the polymer that is used for the main chain. Alternatively, the polymerization in the main chain may take place during or after the formation of the side chains. A polymer network has the advantage that it can be excellently structured.


Alternatively, the polymer may be a copolymer comprising a main chain, the intermediate units  $B$  and the conjugation units  $A$  being present in the main chain as alternating units  $\dots-A_1-B_1-A_2-B_2-\dots$ . This copolymer has the advantage, inter alia, that it can be readily processed and that it enables p-type and n-type-conjugated units to be combined.

It is additionally possible for the polymer to comprise a main chain with side chains, a side chain containing a  $B_1-A_1-B_2$ - structure, wherein  $B_1$ ,  $B_2$  are intermediate units and  $A_1$  is a conjugation unit. This type of polymer has the advantage that it permits a high mobility. If there is sufficient flexibility in the intermediate units  $B_1$ ,  $B_2$  and steric hindrance between the different conjugation units  $A_1$  is substantially or completely precluded, the chains may become ordered relative to each other. As a result of said increased degree of order, the distance between neighboring polymer chains is reduced and hence there is a lower energy barrier for "hopping" of electrons from a first to a second chain, with the accompanying increase in mobility.


Advantageously, the intermediate unit  $B_1$  comprises a mesogenic group. Mesogenic groups are known per se and comprise, for example, cyano or alkoxy biphenyl groups which are coupled by an ether or an ester group to an atom. The advantage of such mesogenic groups is that they exhibit liquid crystalline behavior. This enables the conjugation units to be aligned. By means of a subsequent cross-linking operation, the mesogenic groups are fixed in the desired position with the desired order of the aligned conjugation units. However, it has surprisingly been found that the bisacrylates themselves show liquid crystalline behavior already, even without the presence of additional mesogenic groups, if the alkyl chain in the 'intermediate unit'  $B_1, B_2$  has a chain length of 6 or more, i.e.

the alkyl chain is hexyl, heptyl, octyl, or longer. The liquid crystalline properties indicate that higher-order phases can be obtained for these compounds and hence a higher mobility can be achieved.

- 5 In principle, each oligomeric unit can suitably be used as a conjugation unit. Examples thereof are given in Katz et al., *Acc. Chem. Res.* **34** (2001), 359-369. The conjugation units may be n-type conductive or p-type conductive. Suitable conjugation units are, inter alia, units of formula  $Y_n$ , wherein  $2 \leq n \leq 8$  and Y is selected from the group

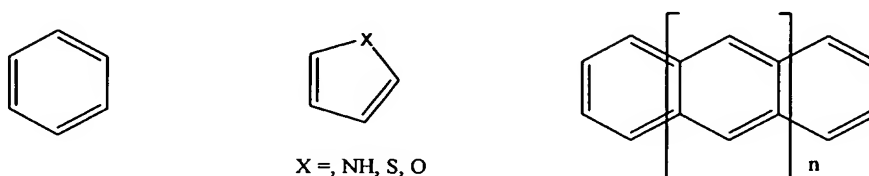

10



15

wherein

- Ar is an aromatic ring system with 4 to 6 carbon atoms that may be substituted with a substituent selected from the group composed of an unbranched  $C_1$ - $C_{20}$ -alkyl-,  $C_3$ - $C_{20}$ -alkoxy-,  $C_1$ - $C_{20}$ -alkyl sulfate-, a branched  $C_3$ - $C_{20}$ -alkyl-, phenyl or benzyl or alkaryl or aralkyl group, and that may comprise up to 4 heteroatoms selected from the group composed of oxygen, sulfur and nitrogen in the aromatic ring system, and

$R_2$  and  $R'_2$  are selected from the group composed of a hydrogen atom and a  $C_1$ - $C_{20}$ alkyl- and a  $C_4$ - $C_{20}$ -aryl group, and alkaryl and arakylgroups which groups may contain substituents.

- 25 Particularly suitable examples of said conjugation units are units on the basis of thienyl and phenyl groups comprising 3-6 groups per unit. Such units correspond to oligomers such as sexithiophene and pentacene. Any further side chains may be chosen and used to improve the solubility and further properties, as is known the skilled person. Such sidechains might further be functionalized.

Intermediate units are preferably alkyl groups with a chain length of the order of 4-20 units. Alternatively phenyl groups, toluyl-, benzyl- and other alkaryl and aralkyl groups can be applied. It is favorable for the chain length of the intermediate units to fairly correspond to the chain length of an adjoining conjugation unit. The chain length is an optimum between the processability and stability requirements. It is not necessary for all intermediate units to have the same chain length; on the contrary, in the case of a polymer in which the conjugation units are mainly present in side chains, it is advantageous if there is some spread in the chain length of the intermediate units. This spread precludes steric hindrance. The intermediate units may comprise customary side chains to influence solubility and reactivity. Measurements of characteristics of transistors comprising the monomer units as semiconductor material show that the length of the alkyl spacer group has a minor effect on the transistor characteristics. The characteristics improve slightly with increasing spacer length. However, from a theoretical point of view, this appears to be bound to a maximum; the conjugated oligomer parts  $A_1$  of the molecules should be in contact with other oligomer groups  $A_1$ ,  $A_x$ , particularly in other molecules, to allow movement of charge carriers through the material.

Reactive end groups at the intermediate units may lead to polymerization. Dependent upon the type of end group, radical polymerization, anionic or cationic polymerization or condensation polymerization may take place. In the case of condensation polymerization, for example, a mixture of bisalcohols and bisacrylic acids is polymerized. An example of a suitable end group is  $R-O-C(O)-CH_2=CH_2$ , wherein R indicates the alkyl residue of the intermediate unit. The attachment of an acrylate group apparently does not dramatically affect the semiconductor properties of the monomer units, even though oxygen atoms, which are rich in electrons, are introduced into the molecule. In comparison with bisalcohols, the use of bisacrylates leads to a slight decrease in mobility but a substantial increase in modulation.

In a further embodiment of the device in accordance with the invention, a second active element is present, which contains a first and a second electrode which are mutually separated by the active layer. In said second active element, the active layer has a relief structure, so that the active layer between the first and the second active element is removed. Such a relief structure can favorably be used to preclude leakage currents through the active layer between neighboring transistors. The application of such a relief structure is highly preferred in the case of a liquid crystalline display screen with transistors as active elements. Structuring may take place in a customary manner by applying a resist layer,

providing this resist layer with a desired pattern by means of photolithography and etching the active layer. Such a method may however put the properties of the active layer at risk. Therefore, it is more favorable to provide the active layer by means of a printing technique. Alternatively, the polymer can be obtained by photopolymerization of the organic material.

5 In a suitable embodiment, a photoinitiator is added to the solution of the monomer that has been derived from the semiconducting monomer. Polymerization was initiated photochemically by exposing the monomer layer to patterned radiation through a mask. Subsequent development of the layer resulted in a structured layer. For the development use is preferably made of the solvent of the monomer. The resolution of the patterns is of the  
10 order of micrometers.


A method of the type mentioned in the opening paragraph is disclosed, inter alia, in Ohsedo et al., *Synt. Met.* **81** (1996), 157-162. In the known method, a polymer is formed in which the conjugation units - terthiophene - are present in the side chains.

A drawback of said method resides in that it is sensitive to the coupling of two  
15 conjugation units.


Therefore, a second object of the invention is to provide a different method of the type mentioned in the opening paragraph.

This object is achieved in that the polymer is prepared from a monomer having a  $B_1-A_1-B_2$  structure, wherein at least one of the groups  $B_1$ ,  $B_2$  comprises a reactive end group. In the method in accordance with the invention, a monomer is applied wherein the  
20 conjugation unit is present in a center part. As a result, the reactivity of the monomer is largely determined by the intermediate units  $B_1$  and  $B_2$ .


In principle, each oligomeric unit can suitably be used as a conjugation unit. Examples thereof are given in Katz et al., *Acc. Chem. Res.* **34** (2001), 359-369. The  
25 conjugation units may be n-type conductive or p-type conductive. In a favorable embodiment use is made of a monomer having a  $B_1-A_1-B_2$  structure, wherein  $A_1$  is a conjugated unit having the formula  $Y_n$ , wherein  $2 \leq n \leq 8$  and  $Y$  is selected from the group formed by



X =, NH, S, O



30



5 wherein

Ar is an aromatic ring system with 4 to 6 carbon atoms that may be substituted with a substituent selected from the group composed of an unbranched C<sub>1</sub>-C<sub>20</sub>-alkyl-, C<sub>3</sub>-C<sub>20</sub>-alkoxy-, C<sub>1</sub>-C<sub>20</sub>-alkyl sulphate-, a branched C<sub>3</sub>-C<sub>20</sub>-alkyl-, phenyl- or benzyl group, and that may contain up to 4 heteroatoms selected from the group composed of oxygen, sulfur and

10 nitrogen in the aromatic ring system, and

R<sub>2</sub> and R''<sub>2</sub> are selected from the group composed of a hydrogen atom and a C<sub>1</sub>-C<sub>20</sub>-alkyl- and a C<sub>4</sub>-C<sub>20</sub>-aryl group, which groups may comprise substituents, and wherein B<sub>1</sub>, B<sub>2</sub> are non-conjugated groups.

15

These and other aspects of the invention will be explained in greater detail with reference to an embodiment and a drawing, wherein:


Fig. 1 is a diagrammatic sectional view of a first embodiment of the device;

and

20

Fig. 2 shows the characteristic of a transistor as shown in Fig. 1.

Embodiment 1: Synthesis of 2,2'''-bis(6-acryloyloxyhexyl)quaterthiophene

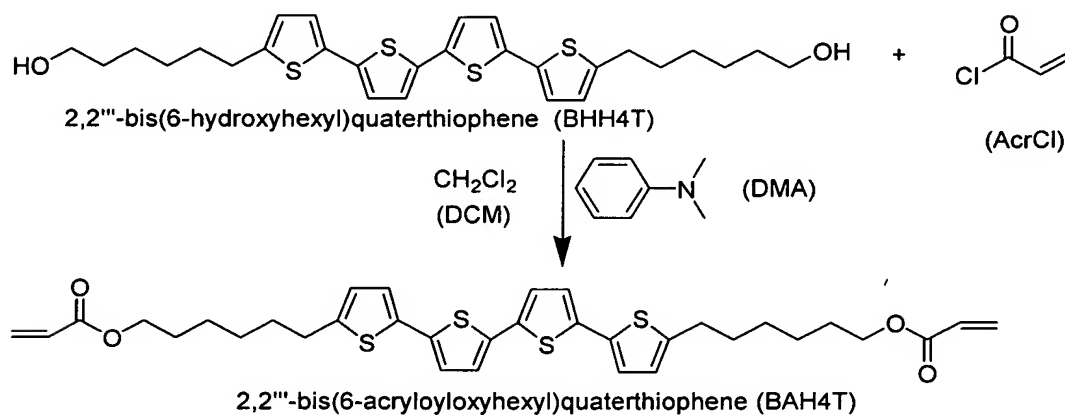

25

A quantity of 0.38 g (4.2 mmol) acrylic acid was added to a mixture of 1.0 g (1.9 mmol) of bisalcohol 2,2''-bis(6-hydroxyhexyl)quaterthiophene and 0.5 g (4.2 mmol) dimethylaniline in 27 ml of dichloromethane at 0 °C in an inert atmosphere. The mixture was allowed to heat up to room temperature and stirred overnight. The resulting solution was filtered and washed with dichloromethane. The remaining dimethylaniline was extracted with hydrochloric acid, and the organic phase was washed with a saturated solution of sodium chloride. It was dried over magnesium sulphate and filtered through a layer of silica gel after which the solvent was evaporated. The orange product was washed with ethanol and dried overnight in a desiccator. It was identified as 2,2'''-bis(6-acryloyloxyhexyl)quaterthiophene. The yield was 0.35 g (35%).

#### Embodiment 2

The bisacrylate derivative as prepared in embodiment 1 was spin-coated onto a test substrate wherein electrodes were already provided. An initiator (Irgacure) was added as the additive. A good film was obtained which was subsequently polymerized in situ by means of photopolymerization. It was found that the transistor was stable in air and light. Transistor characteristics are shown in Fig. 2 wherein the current between source and drain electrode  $I_{SD}$  and the mobility are plotted against the voltage on the gate electrode  $V_g$ . The specific mobility of this material is  $10^{-5} \text{ cm}^2/\text{Vs}$ .

#### Embodiment 3

The thin-film transistor 10 shown in Fig. 1 comprises an electrically insulating substrate 1 on which a first electrode layer 2 is provided. In this layer 2, a source electrode 21 and a drain electrode 22 are defined, which electrodes 21, 22 are mutually separated by a channel 23. A second electrode layer 3 wherein a gate electrode 24 is defined is also present on the substrate 1. If the gate electrode 24 is perpendicularly projected onto the first electrode layer 2 then the gate electrode 24 and the channel 23 demonstrate a substantial overlap. In addition, an intermediate layer 4 and an active layer 5 are present.

Said layers 2, 3, 4, 5 are present on the substrate 1 in the following sequence: second electrode layer 3, intermediate layer 4, first electrode layer 2 and active layer 5. To planarize the substrate, an insulating planarization layer of polyvinyl alcohol (not shown) is present. The second electrode layer 3 contains Au and is provided in accordance with a desired pattern in known manner by means of an exposed and developed photosensitive resist. Between the second electrode layer 3 and the intermediate layer 4, there is provided a



monolayer (not shown) of  $\text{CH}_3\text{-(CH}_2\text{)}_{15}\text{-SH}$  to preclude pinholes in the intermediate layer 4. The intermediate layer 4 comprises a photostructurable organic dielectric, such as benzocyclobutene, polyimide, polyvinyl phenol or a photoresist, in this case the photoresist HPR504. The first electrode layer 2 comprises, in this case, poly(3,4-ethylene dioxothiophene) and a polystyrene sulfonic acid. The first electrode layer 2 is provided by means of spin-coating and structured by exposure to light.

The active layer 5 is spin-coated in a thickness of 50 nm onto the first electrode layer 2. The active layer 5 comprises a polymer network having quaterthiophene as the conjugation unit, and is prepared as indicated in example 1. The weight ratio between the carrier material and the semiconductor is 1. At least a part of the semiconductor layer 5 is present in the channel 23.

The invention described herein may be applied in different variants and yields a device comprising an active layer which is not, or hardly, sensitive to the influence of light and air. Active layers can be prepared in accordance with the invention. It is additionally possible for the active layer to be mixed with a carrier polymer, as described in the non-prepublished application EP01203720.6 (NL010691).

#### Embodiment 4

A quantity of 0.84 g (9.3 mmol) acryloic acid was added to a mixture of 2.0 g (4.2 mmol) of the bisalcohol 2,2''-bis(6-hydroxybutyl)quaterthiophene and 1.1 g (9.3 mmol) dimethylaniline in 50 ml of dichloromethane at 0 °C in an inert atmosphere. The mixture was allowed to heat up to room temperature and was stirred overnight. The resulting solution was filtered, washed with, in succession, hydrochloric acid and brine, dried over magnesium sulphate and filtered through a layer of silica gel after which the solvent was evaporated. The orange product was washed with ethanol and dried overnight in a desiccator. It was identified as 2,2''-bis(6-acryloyloxybutyl)quaterthiophene. The yield was 2.019 g (82.4%).

Films were prepared by spin-coating a 0.5 weight % solution of oligothiophene in chloroform at a rate of 500 rpm for 30 seconds. The photoinitiator Irgacure was added to the solution for photopolymerization experiments in a quantity of 5% of the oligothiophene. Transistor measurements were performed immediately after the preparation, using a HP 4564B semiconductor analyzer in air and light.

#### Embodiment 5



In order to measure the effect of the acrylate groups and the polymerization, transistor characteristics, particularly the mobility (in  $\text{cm}^2/\text{Vs}$ ) and the modulation were measured. The results obtained are shown in Table 1. The decrease in modulation in the monoacrylate polymer appears to be due to initiator residues from thermal initiation, or to non-optimized heating.

monomer or polymer	alkyl group or spacer	end group	mobility ( $\text{cm}^2/\text{Vs}$ )	modulation ( $I_{\text{vd,on}}/I_{\text{vd,off}}$ )
monomer	butyl	bisalcohol	$5 \cdot 10^{-3}$	600
monomer	hexyl	bisalcohol	$2 \cdot 10^{-2}$	1000
monomer	butyl	bisacrylate	$3 \cdot 10^{-4}$	$10^5$
monomer	hexyl	bisacrylate	$4 \cdot 10^{-3}$	$10^5$
polymer (network)	hexyl	acrylate	$5 \cdot 10^{-4}$	$10^5$
monomer	hexyl	monoacrylate	$5 \cdot 10^{-4}$	$10^5$
polymer (oligomer in side chain)	hexyl	acrylate	$4 \cdot 10^{-5}$	$10^4$



Table I – modulation and mobility as a function of monomer and polymer structure.

## CLAIMS:

1. An electronic device provided with an active element having a first and a second electrode, which are separated from each other by an active layer containing a semiconductive or electroluminescent organic material, characterized in that the organic material of an active layer is a polymer comprising conjugated conjugation units which are separated from each other by non-conjugated intermediate units B in such a manner that the conjugation of the first and the second conjugation unit  $A_1$ ,  $A_2$  is interrupted in an intermediate unit  $B_1$ .
2. An electronic device as claimed in claim 1, characterized in that the polymer is a polymer network comprising a first and a second main chain which are interconnected via side chains, a side chain containing a  $B_1$ - $A_1$ - $B_2$  structure, with  $B_1$ ,  $B_2$  being intermediate units and  $A_1$  being a conjugation unit.
3. An electronic device as claimed in claim 1, characterized in that the polymer is a copolymer comprising a main chain, the intermediate units B and the conjugation units A being present in the main chain as alternating units  $\dots$ - $A_1$ - $B_1$ - $A_2$ - $B_2$ - $\dots$ .
4. An electronic device as claimed in claim 1, characterized in that the polymer comprises a main chain with side chains, a side chain containing a  $B_1$ - $A_1$ - $B_2$ - structure, wherein  $B_1$ ,  $B_2$  are intermediate units and  $A_1$  is a conjugation unit.
5. An electronic device as claimed in claim 1, characterized in that the intermediate unit  $B_1$  comprises a mesogenic group.
6. An electronic device as claimed in any one of the preceding claims, characterized in that the conjugation unit is a unit of formula  $Y_n$ , wherein  $2 \leq n \leq 8$  and Y is selected from the group composed of



X =, NH, S, O



5

wherein

Ar is an aromatic ring system with 4 to 6 carbon atoms that may be substituted with a  
 10 substituent selected from the group composed of an unbranched C<sub>1</sub>-C<sub>20</sub>-alkyl-, C<sub>3</sub>-C<sub>20</sub>-  
 alkoxy-, C<sub>1</sub>-C<sub>20</sub>-alkylsulphate-, a branched C<sub>3</sub>-C<sub>20</sub>-alkyl-, phenyl or benzyl group, and that  
 may comprise up to 4 heteroatoms selected from the group composed of oxygen, sulfur and  
 nitrogen in the aromatic ring system, and

R<sub>2</sub> and R'<sub>2</sub> are selected from the group composed of a hydrogen atom and a C<sub>1</sub>-C<sub>20</sub>alkyl- and  
 15 a C<sub>4</sub>-C<sub>20</sub>-aryl group, which groups may comprise substituents.



7. An electronic device as claimed in claim 1, characterized in that a second  
 active element is present, which contains a first and a second electrode which are mutually  
 separated by the active layer, and in that the active layer has a relief structure, so that the  
 20 active layer between the first and the second active element is removed.

8. An electronic device as claimed in claim 1 or 7, characterized in that the active  
 element is a transistor wherein a third electrode is present which is separated from the active  
 layer by a dielectric, and wherein the active layer comprises an intrinsic, undoped  
 25 semiconductive material.


9. A method of preparing a polymer comprising conjugated conjugation units A  
 and non-conjugated intermediate units B, an intermediate unit B<sub>1</sub> mutually separating a first  
 and a second conjugation unit A<sub>1</sub>, A<sub>2</sub> in such a manner that the conjugation of the first and  
 30 the second conjugation unit A<sub>1</sub>, A<sub>2</sub> is interrupted in the intermediate unit B<sub>1</sub>, characterized in

that the polymer is prepared from a monomer having a  $B_1-A_1-B_2$  structure, wherein at least one of the groups  $B_1$ ,  $B_2$  comprises a reactive end group.


10. A monomer having a  $B_1-A_1-B_2$  structure, wherein  $A_1$  is a conjugated unit of formula  $Y_n$ , wherein  $2 \leq n \leq 8$  and  $Y$  is selected from the group composed of



$X = \text{NH, S, O}$



10



wherein

- Ar is an aromatic ring system with 4 to 6 carbon atoms that may be substituted with a substituent selected from the group composed of an unbranched  $C_1$ - $C_{20}$ -alkyl-,  $C_3$ - $C_{20}$ -alkoxy-,  $C_1$ - $C_{20}$ -alkyl sulphate-, a branched  $C_3$ - $C_{20}$ -alkyl-, phenyl- or benzyl group, and that may contain up to 4 heteroatoms selected from the group composed of oxygen, sulfur and nitrogen in the aromatic ring system, and

- $R_2$  and  $R'_2$  are selected from the group composed of a hydrogen atom and a  $C_1$ - $C_{20}$ -alkyl- and a  $C_4$ - $C_{20}$ -aryl group, which groups may comprise substituents, and wherein  $B_1$ ,  $B_2$  are non-conjugated groups.

11. A method as claimed in claim 9, characterized in that the monomer used is the monomer as claimed in claim 10.

25

12. A polymer that can be obtained by means of the method as claimed in claim 9.

## ABSTRACT:

The electronic device of the invention comprises one or more active elements, each comprising a first and a second electrode and an active layer of organic material separating the first and second electrodes. Examples of active elements are thin-film transistors and light-emitting diodes. The active layer comprises a polymeric material having  
5 conjugated units A and non-conjugated intermediate units B, which intermediate units B separate the conjugated units A from each other, such that no conjugation extends from a first conjugated unit  $A_1$  to a second conjugated unit  $A_2$ . The polymeric material may be a polymer network, an alternating copolymer or a polymer in which the conjugated units are present in side chains. The polymer can be prepared from monomers having a  $B_1-A_1-B_2$  structure,  
10 wherein at least one of  $B_1$  and  $B_2$  comprises a reactive group enabling polymerization.

Fig. 1

# INTERNATIONAL SEARCH REPORT

IB2004/050680

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 H01L51/40 H01L51/20

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 H01L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	US 6 335 539 B1 (PURUSHOTHAMAN SAMPATH ET AL) 1 January 2002 (2002-01-01)  figures 1-3 column 5, lines 8,20,38 the whole document	9,10  1

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*Z\* document member of the same patent family

Date of the actual completion of the international search

28 September 2004

Date of mailing of the international search report

05/10/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Bader, K

# INTERNATIONAL SEARCH REPORT

Information on patent family members

IB2004/050680

Patent document cited in search report	Publication date	Patent family member(s)	Publication date	
US 6335539	B1	01-01-2002	US 2002045289 A1	18-04-2002